

CUT45 PFC SC

Features:


- With separated compressor unit
- Rugged, robust, and industrial look with ergonomic design
- **ClearVision** Technology
- Adaptable wide voltage range
- Welding engineer mode
- **SurePlasma** technology for consistent arc ignition performance with different torch lengths
- Mesh cutting, 2T/4T, non HF arc ignition and pilot arc
- Gas check, postflow time setting, cutting torch length setting
- Power factor correction (PFC), generator-friendly
- Quick factory reset; auto sleep mode
- **ABAP: Active Balancing Air Passage**
- On demand fan
- Key power electronic component protection
- Overcurrent and overheat protection

SISAB
SVETS & VERKTYGSGRÖSSISTEN SINCE 1967



Specifikationer:

	CUT45PFC SC L2S421	
Ingångseffekt	AC95–265 V, 50/60 Hz	
	115 V	230 V
Öppen kretsspänning	300 V	
Märk ingångsström	37 A	27 A
Nominell ineffektkapacitet	4,3 kVA	6,2 kVA
Utgångsströmmråde	20–30 A	20–45 A
Bågestart	NHF	
Nominell arbetscykel	25 %	
Bra skärning (kolstål) @400mm/min	5 mm	14 mm
Severance (kolstål)	12 mm	25 mm
Effektivitet	86 %	
Effektfaktor	0,99	
Tom statsmakt	γ50 W	
skyddsklass	IP23S	
Isoleringsklass	H	
Mått L×B×H	548×187×558 mm	
Nettovikt	26,5 kg	

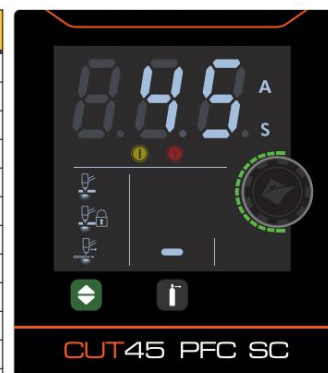

Standardtillbehör

- 6M IPT40 skärbrännare
- 3M jordklämma
- 2 st elektroder
- 2 st munstycken
- 2 st slangklämmor
- Snabbtagg

