

# Powerstation **PST.2500**

Euroboor Powerstation är den idealiska ersättningen för bensingeneratorer



|                              |              |
|------------------------------|--------------|
| Magnetbormaskin ECO.30S+     | 5.30 timmar  |
| Magnetbormaskin ECO.32+      | 6.15 timmar  |
| Magnetbormaskin ECO.50+/T    | 10.30 timmar |
| Magnetbormaskin ECO.100S+/TD | 7.15 timmar  |
| Kantfasmaskin B60S           | 13.15 timmar |
| Elektrisk toppslip EDG.600   | 7.15 timmar  |




# Powerstation PST.2500

## Features

- Litiumjonneller med hög kapacitet
- Snabbladdning (3 timmar)
- Elförsörjning utan fluktuationer
- Kan användas praktiskt taget ÖVERALLT
- Lätt att använda
- Idealisk för elverktyg



|                          |                                  |
|--------------------------|----------------------------------|
| Rated output voltage     | AC 220 V 50/60 Hz                |
| Socket specification     | 2 x EU type F (grounded) IP44    |
| Rated output power       | Max. 3.000 W                     |
| Surge power              | Max. 6.000 W                     |
| Overload protection      | Fuse (20 A)                      |
| Battery capacity         | 2,496 Wh                         |
| Battery type             | Ternary Lithium Ion battery cell |
| Battery voltage          | DC 48 V                          |
| Battery cooling          | Air (2 x automatic air fans)     |
| Charger voltage          | AC 200-240 V 50/60 Hz            |
| Charger output           | 54.6 V (15 A)                    |
| Charging time            | ± 3.0 hours                      |
| Charging cycles          | 1.500 x (capacity > 80%)         |
| Operating temperature    | -20°C up to 40°C                 |
| Charging temperature     | 0°C up to 30°C                   |
| Storage temperature      | 0°C up to 25°C                   |
| Dimensions (L x W x H)   | 465 x 310 x 410 mm               |
| Weight                   | 26 kg                            |
| Ingress protection class | IP21 (indoor)                    |
| Warranty                 | 12 months                        |

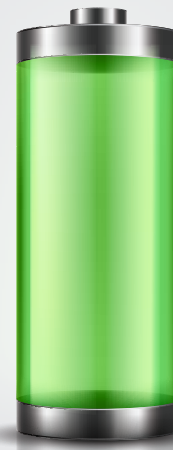

CHARGING  
**100%**  
**3** hours



Euroboor makes every effort to meet quality and integrity requirements. That is why we as an organization are proud of the recognition of some leading organizations worldwide:



\*Disclaimer: Euroboor is not liable for any damage caused to the machine due to electrical problems in the workplace. Above mentioned protection is not guaranteed in all cases of voltage spikes and/or frequency fluctuations. Euroboor accepts no liability when it comes to the power protection not functioning or functioning poorly.

[www.euroboor.com](http://www.euroboor.com)

Drilling – Beveling – Sawing – Grinding – Lifting

Euroboor BV, Kryptonstraat 110,

2718 TD, Zoetermeer, The Netherlands

T:+31(0)79 361 4990 – [info.nl@euroboor.com](mailto:info.nl@euroboor.com)